
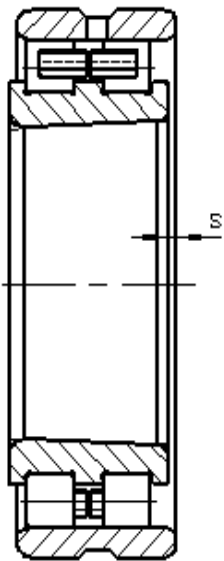


PRECISION CYLINDRICAL ROLLER BEARINGS

TYPE NN3016KM/W33-SP

PRECISION SP

Double row, with 1:12 taper bore

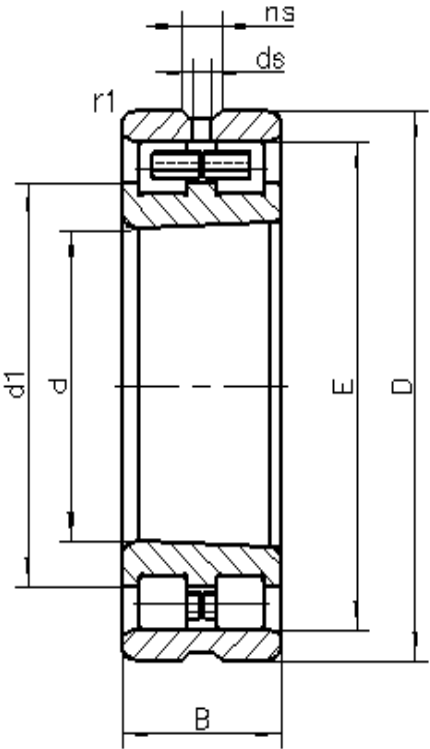

d	80	mm	
D	125	mm	
B	34	mm	
Da	116	mm	Tolerance: H12
da	93	mm	Tolerance: h12
r1 min	1.1	mm	
ra1 max	1	mm	
E	113	mm	
dl	97.1	mm	
ns	6	mm	
ds	3	mm	
s	1.4	mm	Axial displacement facility from centre position
m	1.51	kg	Mass
Cr	115000	N	Basic dynamic load rating, radial
Cor	177000	N	Basic static load rating, radial
Limiting speeds	7500	r/min	Lubrication: oil
	6300	r/min	Lubrication: grease

