
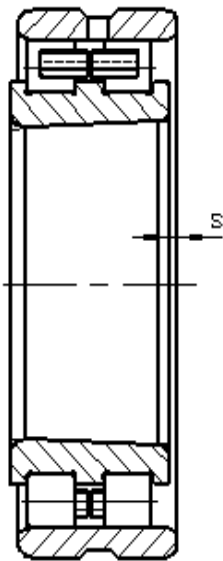


PRECISION CYLINDRICAL ROLLER BEARINGS

TYPE NN3017KM/W33-SP

PRECISION SP

Double row, with 1:12 taper bore

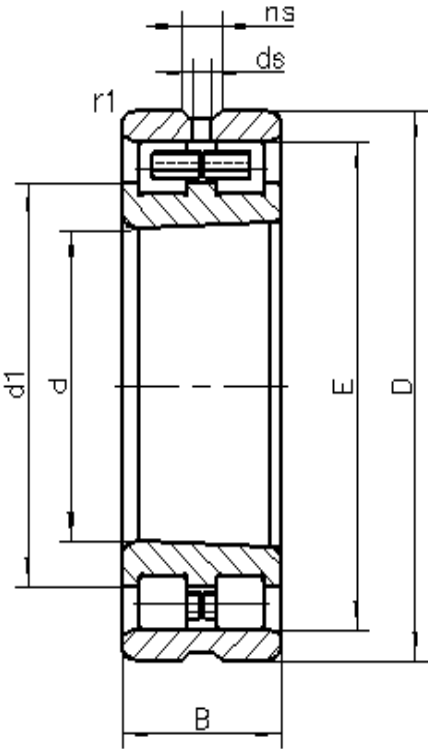

d	85	mm	
D	130	mm	
B	34	mm	
Da	121	mm	Tolerance: H12
da	98	mm	Tolerance: h12
r1 min	1.1	mm	
ra1 max	1	mm	
E	118	mm	
dl	102	mm	
ns	6.5	mm	
ds	3.2	mm	
s	1.4	mm	Axial displacement facility from centre position
m	1.58	kg	Mass
Cr	120000	N	Basic dynamic load rating, radial
Cor	190000	N	Basic static load rating, radial
Limiting speeds	7000	r/min	Lubrication: oil
	6000	r/min	Lubrication: grease

