
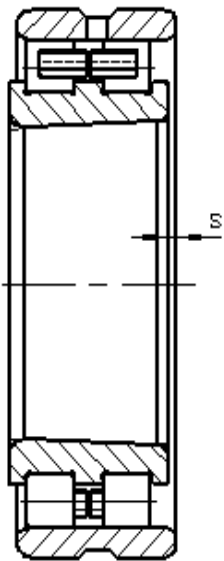


PRECISION CYLINDRICAL ROLLER BEARINGS

TYPE NN3022KM/W33-SP

PRECISION SP

Double row, with 1:12 taper bore

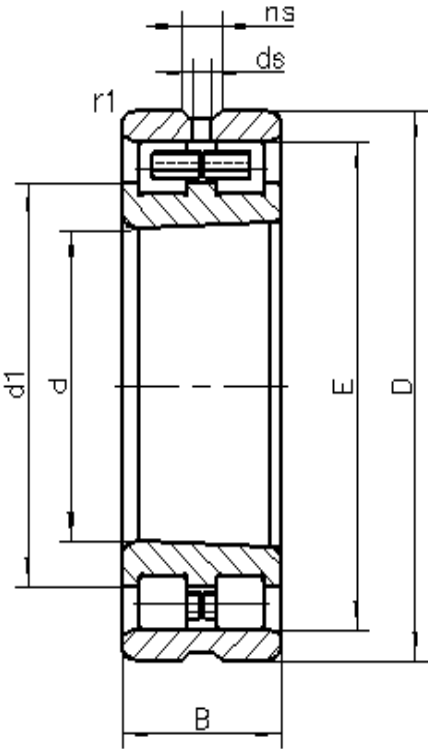

d	110	mm	
D	170	mm	
B	45	mm	
Da	158	mm	Tolerance: H12
da	127	mm	Tolerance: h12
r1 min	2	mm	
ra1 max	2	mm	
E	155	mm	
dl	132.7	mm	
ns	8	mm	
ds	4	mm	
s	1.65	mm	Axial displacement facility from centre position
m	3.61	kg	Mass
Cr	223000	N	Basic dynamic load rating, radial
Cor	363000	N	Basic static load rating, radial
Limiting speeds	5300	r/min	Lubrication: oil
	4500	r/min	Lubrication: grease

